

A Dichroic Plate with Rounded Corners for NASA's 34m Beam Waveguide Antenna

Watt Veruttipong*, Behrouz Khayatian, William Imbriale

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, CA 91109

Abstract— A S/K-band frequency selective surface (FSS) or a dichroic plate is designed, manufactured and tested for use in NASA's Deep Space Network (DSN) 34m beam waveguide (BWG) antennas. Due to its large size, the proposed dichroic incorporates a new design feature, waveguides with rounded corners to cut cost and allow ease of manufacturing the plate. The dichroic is designed using an analysis that combines the Finite Element Method (FEM) for arbitrarily shaped guides with the Method of Moments and Floquet mode theory for periodic structures. The software was verified by comparison with previously measured and computed dichroic plates. The large plate was manufactured with end-mill machining. Their RF performance was measured and is in excellent agreement with the analytical results. The dichroic has been successfully installed and is in operational at three NASA Deep Space Stations.

I. INTRODUCTION

DSN 34m BWG antennas operate in various transmit/receive configurations to support Uplink (UL) and Downlink (DL) communications with several current and future spacecraft. The S/K dichroic plate is designed to support the Lunar Reconnaissance Orbiter (LRO) and the James Webb Space Telescope (JWST). The dichroic will pass DL Ka-band (25.5 – 27.0 GHz) and reflect UL/DL S-band (2.025 – 2.300 GHz) in the BWG configuration as shown in Figure 1. The S/K dichroic plate is composed of a large number of small perforated areas as shown in Figures 2 and 3. As oppose to conventional type of rectangular waveguides with sharp corners, this structure employs rectangular openings with rounded corners. This will eliminate the need for wire EDM technique during the fabrication. Wire EDM technique requires very long fabrication time and it is not cost effective for a very large plate. A new dichroic with rounded corners can use an end-mill machining which significantly reduces fabrication time and cost.

Canonical rectangular waveguide modes employed in [1] cannot be used for rounded waveguide structures. The dichroic is designed using a combined FEM for arbitrarily shaped guides in conjunction with Method of Moments and Floquet modes of periodic structures [2]. Other types of FEM techniques such as High Frequency Structure Simulator (HFSS) [3] can also be used to design and analysis FSS typed structures of arbitrary shape cross section. The technique used to design the dichroic plate in this study was later verified using HFSS.

II. DESIGN METHODOLOGY

Waveguide layout configuration for this design somewhat resembles the one presented in [1]. However, the sharp edges of waveguide structures in [1] are replaced by round edges as

shown in Figure 2. A plane wave incident assumption is used. It is also assumed that the dichroic plate acts as an infinite periodic structure with a 30° angle of incidence by a plan wave as shown in Figure 1.

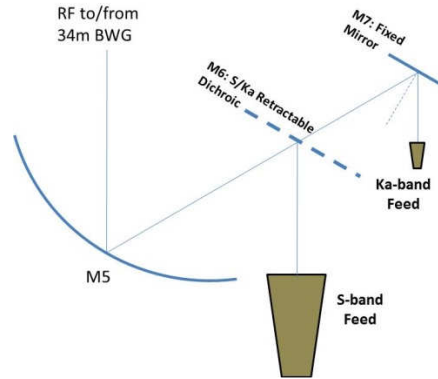


Figure 1: Part of DSN 34m BWG structure employing S/K dichroic plate.

There are four basic parameters in this design which include height, width and radius of curvature at the edge of the waveguide and the thickness of the dichroic plate. While four parameters work together to tune the plate at S/K-bands, height and width of the waveguide are primarily used to tune the plate for TE and TM transmission/reflection coefficients. Perforation on the dichroic plate is made over an ellipse with major and minor axis of 46"x40" and its thickness ensures very small reflection and adequate transmission at K-band. Furthermore, the minimum radius of curvature of round edges was selected to ease manufacturing process for the end-mill machining.

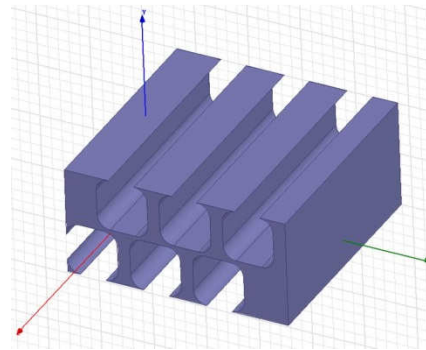


Figure 2: Dichroic model in HFSS. Only a unit cell is used in the calculations. Drawing is not to scale.

Reflection coefficient requirements are to be better than -15 dB over the K-Band and better than -25 dB at 25.9 GHz (+/-0.1

GHz) for JWST downlink operation. The reflection coefficient at the S-band (2.10 – 2.30 GHz) should be about 0.0 dB.

III. CALCULATED AND MEASURED DATA OF THE DICHROIC PLATE

The S/K dichroic plate is fabricated at Custom Microwave Inc. (CMI) and is made from a solid piece of Aluminum. Reflected Transverse Electric (TE) and Transverse Magnetic (TM) incident fields on the dichroic plate from a 30° incident field are computed using the FEM technique as described in [2]. Measurement set up is shown in Figure 3 where the reflection coefficients are measured using two horns facing the dichroic plate at 30° incident angles. Calculated vs. measured TE and TM reflection coefficients are shown in Figures 4 and 5. Measured and calculated results show excellent agreement over the K-band. S-band reflection coefficient requirements are met and nearly zero dB across the band based on test results at a DSN station.

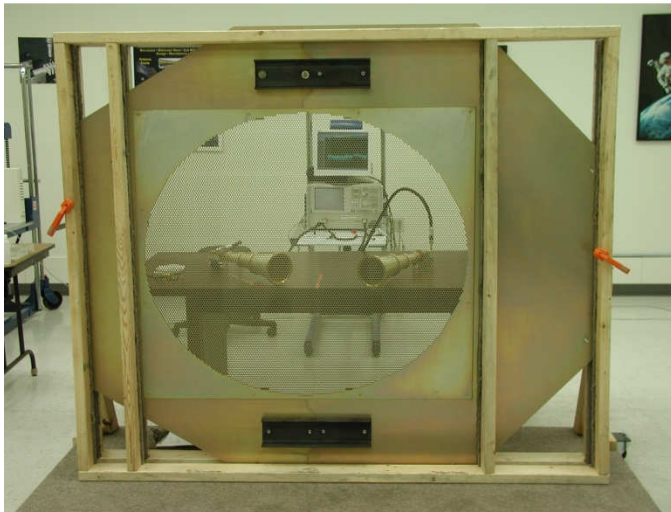


Figure 3: Manufactured S/K dichroic plate and measurement set up used to measure TE and TM reflection coefficient.

IV. CONCLUSION

The S/K dichroic plate is designed with rounded corners in its waveguide structures to avoid the high cost and long fabrication time of the wire EDM process. Excellent agreement between TE and TM reflection coefficients are observed when comparing calculated vs. measured results. There is better than 25 dB return loss over the operating band. The dichroic noise temperature contribution is within the subsystem requirement allocated for JWST downlink communication. The dichroic has been successfully installed and is in operational at three NASA Deep Space Stations.

ACKNOWLEDGEMENT

This research was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract

with the National Aeronautics and Space Administration.

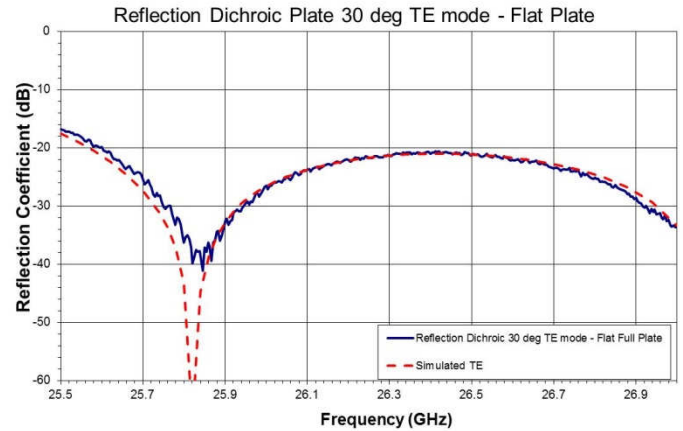


Figure 4: Part of DSN 34m BWG structure employing S/K dichroic plate.

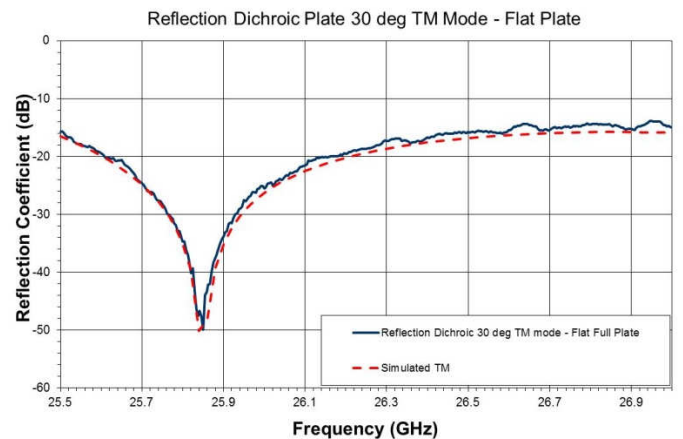


Figure 5: Part of DSN 34m BWG structure employing S/K dichroic plate.

REFERENCES

- [1] J. C. Chen, P. H. Stanton, and H. F. Reilly "Performance of the X-/Ka-/KABLE-Band Dichroic Plate in the DSS-13 Beam Waveguide Antenna" The Telecommunications and Data Acquisition Progress Report 42-115, July-September 1993, Jet Propulsion Laboratory, Pasadena, California, pp. 54-64, November 15, 1993.
- [2] W. A. Imbriale, "Analysis of a Thick Dichroic Plate with Arbitrarily Shaped Holes," InterPlanetary Network Progress Report 42-146, vol. April-June 2001, http://tmo.jpl.nasa.gov/progress_report/issues.html, Accessed December 2001.
- [3] "High Frequency Structure Simulator (HFSS)," Ansoft Corporation. <http://www.ansoft.com/products/hf/hfss/>